


	INTAKE	EXHAUST
ADVERTISED DURATION	266°	268°
ACTUAL CAM LIFT (in/mm)	.400" / 10.16mm	.400" / 10.16mm
ROCKER ARM RATIO	1:1	1:1
CENTERLINE	130°	113°
LOBE SEPERATION	121.5°	
DURATION AT 0.050" CAM	220°	222°
DURATION AT 0.050" VALVE	220°	222°
VALVE CLEARANCE	.008" / .203mm COLD	.010" / .254mm COLD
RECOMMENDED SPRING KIT	BC0600 (Single Spring) or BC0610 (Dual Spring)	

CAMSHAFT TIMING AT 0.050" VALVE LIFT	OPEN	CLOSES
	INTAKE	20° ATDC
EXHAUST	44° BBDC	2° BTDC

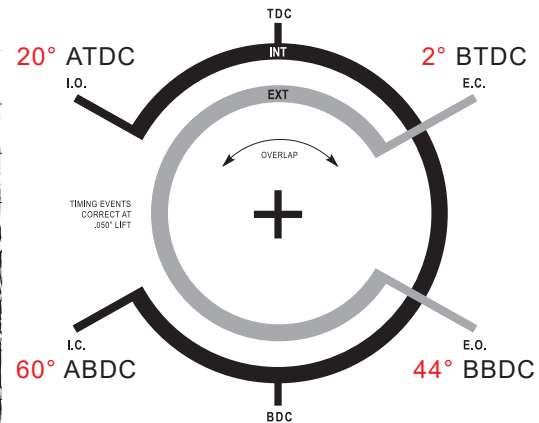

NOTES

BUCKET DIAMETER: 1.200"
No set screws included for non-AVCS configuration.

BC does not recommend using synthetic oil during break-in or operation. Follow OEM manufacturer's torque sequence and specifications. Use liberal amount of aftermarket engine assembly lube during installation. Check follower or bucket surfaces for abnormal wear and/or scuffing. On initial start-up and break-in run engine at 1500-2500 rpm for 20 minutes. **Camshafts damaged by improper installation, excessive spring pressure or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles.**

